

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## MATTRESS HAVING AIR FLUIDIZED SECTIONS

### Background and Summary of the Invention

5 The present invention relates to a replacement mattress which is portable between bed frames. More particularly, the present invention relates to a mattress having a plurality of modular mattress zones including air bladders and air fluidized sections. The mattress replacement of the present invention has reduced maintenance requirements compared to other air fluidized beds.

10 The present invention provides a modular mattress replacement having both air fluidized sections and regular air bladder sections to support a patient. The air fluidized sections provide reduced pressure against the patient's body resting on the mattress. In illustrated embodiments, the air fluidized sections are located in the seat section and foot or heel section of the mattress. It is understood that the air fluidized sections may be positioned at any desired location within the mattress.

15 The air fluidized sections are supplied with air from a blower to move a fluidizable medium within the air fluidized sections. The mattress also includes air cushions or bladders located adjacent the fluidized sections. In the illustrated embodiment, the air cushions are used in a head section of the mattress and in a knee section of the mattress. The head air cushions of the present invention are configured to  
20 move toward a head end of the bed as the head section of the mattress is articulated to an elevated position to reduce shear forces on a person lying on the mattress.

Air fluidized beds have been used as patient support systems. In this type of bed, a fluidizable medium such as tiny spheres formed of glass, ceramics, or silicone are contained within a suitable support and fluidized by air passing through the support  
25 mechanism to support the patient. In a common design, the fluidizable medium is supported by a diffuser board which is permeable to air but impermeable to the fluidized medium. A retaining mechanism which is impermeable to air is positioned around outer edges of the diffuser board. A flexible cover encloses the fluidizable medium and is permeable only to air flow.

30 Conventional air fluidized beds are typically tied to the structure of a frame. The air fluidized beds are typically heavy and rather difficult to move. The present invention provides a replacement mattress which includes air fluidized sections. The

-2-

replacement mattress, including the air fluidized sections, is not tied to a particular frame. In other words, the mattress replacement can be easily moved from one frame to another to provide the benefits of an air fluidized mattress on any frame.

According to one aspect of the present invention, a mattress includes an  
5 outer cover having an interior region and a top support surface, and a module receiving section located in the interior region of the cover. The module receiving section has a first coupling portion in fluid communication with an air supply. The mattress also includes an air fluidized module having a first chamber containing a fluidizable material, a second chamber, a second coupling portion coupled to the module in fluid communication  
10 with the second chamber, and an air permeable sheet located between the first and second chambers. The air fluidized module is configured to be located in the module receiving section, and the first and second coupling portions are configured to be coupled together to provide fluid communication between the air supply and the second chamber so that air from the air supply passes into the second chamber and through the air permeable sheet to  
15 fluidize the fluidizable material in the first chamber.

In the illustrated embodiment, the air fluidized module has a top surface which is air permeable. The illustrated mattress further includes a non-fluidized module including a flexible air impermeable outer wall defining an interior region and a third coupling portion coupled to the outer wall in fluid communication with the interior region  
20 of the non-fluidized module. The fluidized module and the non-fluidized module are interchangeable in the module receiving section with the first coupling portion being configured to couple alternatively with one of the second coupling portion of the fluidized module and the third coupling portion of the non-fluidized module.

Also in the illustrated embodiment, a manifold is located between the air  
25 supply and the first coupling portion of the module receiving section. A control valve is configured to control the rate of air supply to the first coupling portion.

According to another aspect of the present invention, a support module is provided for a mattress. The support module includes a base formed from an air impermeable material. The base includes a bottom surface and a side wall configured to  
30 define an interior region. The support module also includes an air permeable diffuser located within the interior region of the base. The diffuser is coupled to the side wall of the base to define an upper air fluidized chamber configured to receive a fluidizable

-3-

material therein and a bottom plenum. The support module further includes an air impermeable top surface coupled to the base, and a plurality of baffles coupled to the base. The baffles are located in the plenum. The support module also includes an air connector coupled to the base in communication with the plenum to supply air to the  
5 plenum to fluidize the fluidizable material within the air fluidized chamber above the plenum.

In one illustrated embodiment, the air fluidized chamber includes an access port providing for removing and inserting the fluidizable material. In another illustrated embodiment, a top cover including the air permeable top surface and a side wall extending  
10 from the top surface, the side wall of the top cover is coupled to the side wall of the base. The top cover is removable from the base to provide access to the fluidizable material.

In the illustrated embodiment, at least one grounding strip is coupled to the side wall of the base. A conductive cable is coupled to the at least one grounding strip to provide a ground connection for the support module.

15 In one illustrated embodiment, base includes a bottom surface, a frame, and a separate side wall coupled together to form the base. The frame is coupled to the side wall of the base and is configured to support the diffuser. In the illustrated embodiment, the frame includes a plurality of webs extending between opposite sides of the frame. The baffles are coupled between the webs and the bottom surface of the base.  
20 The baffles are each formed to include a plurality of apertures to permit air flow through the plenum. A plurality of fasteners is coupled to the side wall of the base with the fasteners being configured to secure the support module within the mattress.

According to yet another aspect of the present invention, a mattress having a head end and a foot end includes a first support section configured to support an  
25 occupant's feet, legs, and seat, and a head support section located adjacent the head end of the mattress. The head support section has a base portion and a shear reducing support surface pivotably coupled to the base portion. The mattress also includes a coupler connected between the first support section and the head support section so that the head support section moves toward the head end of the mattress as the head support  
30 section is moved to an elevated position relative to the first support section.

In the illustrated embodiment, the first mattress section includes an air fluidized module containing a fluidizable material. The fluidized module is connected to

an air supply. The first support section also includes an inflatable non-fluidized zone connected to the air supply.

Also in the illustrated embodiment, the head support includes a set of air cushions pivotably coupled to the base. A second set of air cushions is illustratively  
5 located above the air cushions pivotably coupled to the base.

According to a further aspect of the present invention, a mattress includes an outer cover formed from an air impermeable material. The outer cover is configured to define an interior region and having a top support surface. The mattress also includes at least one air fluidized support module located within the interior region of the cover of  
10 the mattress. The air fluidized module includes a plenum, a chamber located over the plenum, and a fluidizable material located within the chamber. The chamber includes an air permeable top surface. The mattress further includes a connector coupled to the plenum, the connector being configured to be coupled to an air supply to supply air to the plenum and fluidize the fluidizable material located within the chamber. The mattress also  
15 includes a vent connector coupled to the outer cover in communication with the interior region of the cover. The vent connector is configured to exhaust air from the interior region of the cover.

In the illustrated embodiment, a fan is coupled to the vent connector to assist removal of air from the interior region of the cover. A second connector is coupled  
20 to the outer cover. The second connector is configured to be coupled to an air supply. A tube is coupled between the second connector on the outer cover and the connector of the plenum to supply air to the plenum through the outer cover.

In the illustrated embodiment, a heat exchanger is coupled between the air supply and the second connector of the outer cover. An air bladder is located adjacent  
25 the air fluidized support module. An air supply line extends through the air bladder and is coupled to the connector to supply air to the plenum. The air bladder is also formed to include a vent slot in communication with the vent connector. A tube having a plurality of holes is coupled to the air bladder in communication with the vent slot. The tube is coupled to the vent connector.

30 Additional features and advantages of the invention will become apparent to those skilled in the art upon consideration of the following detailed description of the

illustrated embodiment exemplifying the best mode of carrying out the invention as presently perceived.

### Brief Description of the Drawings

5                   A detailed description particularly refers to the accompanying figures in which:

                  Fig. 1 is an exploded perspective view of the mattress replacement of the present invention with a plurality of modular zones, including air fluidized zones and air cushions, located within an outer cover, and illustrating controls for the replacement  
10   mattress illustrated in diagrammatical form;

                  Fig. 2 is an exploded perspective view of an air fluidized seat zone of the present inventions;

                  Fig. 3 is an exploded perspective view of another embodiment of the air fluidized seat zone;

15                  Fig. 4 is an exploded perspective view of an air fluidized foot zone of the mattress replacement;

                  Fig. 5 is an exploded perspective view of another embodiment of the air fluidized foot zone;

                  Figs. 6-8 illustrate details of an air wall bladder configured to be located  
20   within the mattress surrounding the air fluidized foot zone and seat zone;

                  Fig. 9 is a sectional view illustrating details of another embodiment of the present invention which includes a reduced shear head support section;

                  Fig. 10 is a sectional view similar to Fig. 9 illustrating movement of air bladders within the head section of the mattress toward a head into the mattress as a head  
25   section is pivoted upwardly to an angled position;

                  Fig. 11 is a perspective view of another embodiment of a reduced shear head support section for use with the mattress replacement of the present invention; and

                  Figs. 12 and 13 illustrate yet another embodiment of a reduced shear head section of the present invention.

30

Detailed Description of the Drawings

Referring now to the drawings, Fig. 1 illustrates a mattress replacement apparatus 10 designed for use in any bed frame or other support surface. The mattress 10 includes a bottom cover or base 12 having a bottom surface 14 and a sidewall 16. Base  
5 12 is illustratively made from an air impervious, wipeable and cleanable plastic material. Base includes a head end 23 and a foot end 25.

Mattress 10 also includes a top air impermeable cover 18 having a top surface 20 and a downwardly extending sidewall 22. Top cover 18 is secured to base 12 with suitable fasteners such a zipper, snaps, or other coupling mechanism. An interior  
10 region 24 of mattress 10 is defined between the base 12 and the cover 18. A plurality of modular mattress components is located within the interior region 24 of mattress 10.

An air support bladder 26 is located within interior region 24 of cover 12 adjacent head end 23. Air support bladder 26 includes a center inflatable portion 28 and a pair of spaced apart inflatable tubes 30. A head zone air cushion 32 and a shoulder zone  
15 air cushion 34 are located above surface 28 of air support 26. A lumbar cushion 36 is located within interior region 24 of base 12 adjacent shoulder zone cushion 34. A U-shaped air wall bladder 38 having side sections 40 and 42 and foot end section 44 is also located within interior region 24 of mattress 10 adjacent lumbar cushion 36.

An air fluidized seat section or zone 48 is located within a center space 46  
20 defined by air wall bladder 38. A seat section cover 50 is coupled over the air fluidized seat zone 48. A knee zone air cushion 52 is located within center space 46 adjacent air fluidized seat zone 48. An air fluidized foot zone 54 is located within center space 46 of air wall bladder 38 between knee zone cushion 52 and end wall 44. A foot zone cover 56 is coupled over the air fluidized foot zone 54.

25 An air blower 58 is configured to blow air through a heat exchanger 60 and into a manifold 62. Manifold 62 is coupled to a plurality of control valves 64 which control air pressure supplied to various air zones within the mattress 10 in a conventional manner.

Air from one of the control valves passes through tube 66 to connector 68  
30 which passes through an aperture 70 formed in top cover 18 into an aperture 74 formed in air wall bladder 38. Tube 76 is coupled to connector 68. Tube 76 extends through side portion 40 of air wall bladder 38. Tube 76 is coupled to an L-shaped connector 78 as



-7-

shown in Fig. 8 to supply air to an inlet 80 of air fluidized seat zone 48 illustrated in Figs. 2 and 3. Connector 78 passes through aperture 82 formed in side section 40 of air wall bladder 38.

Another supply tube 84 extends through an aperture 86 formed in bottom surface 14 of cover 12 and is coupled to a manifold connector 88. Manifold connector 88 includes a plurality of output lines 90 to supply the various air zone bladders 26, 32, 34, 36, 38, and 52 with air through suitable connectors. Each zone includes snaps or other suitable fasteners to secure the zone to the cover 12 and adjacent zones.

Another air inlet tube 92 is coupled to L-shaped connector 94 which extends through an aperture 96 formed in the bottom surface 14 of cover 12. The connector 94 is coupled to an air inlet 98 of air fluidized foot zone 54 as illustrated in Figs. 4 and 5.

Fig. 1 illustrates an air quilt or blanket 100 designed to fit on top surface 20 of impermeable cover 18. Illustratively, the air blanket 100 is made of a disposable or washable material. The blanket 100 includes an impermeable layer 102 and an air permeable layer 104 which is supplied with air through a suitable connector 106. Layer 104 of air blanket 100 soaks up any drainage from a patient lying on the mattress 10 and also supplies air flow through layer 104. It is understood that the air flow layer 104 may extend across the entire air blanket 100, if desired.

The air blanket 100 permits continuous air flow past the patient while maintaining the impermeable cover 18 to seal interior region 24 of mattress 10. Therefore, the mattress components and the air fluidizable medium within the air fluidized seat zone 48 and air fluidized foot zone 54 are not contaminated by fluids from the patient or other contaminants entering the mattress 10.

Additional details of the air fluidized seat zone 48 and cover 50 are illustrated in Figs. 2 and 3. A base 108 has a generally rectangular shape. A plurality of snaps 110 or other fasteners are provided to secure the air fluidized seat zone 48 to adjacent bladders. A frame 112 is configured to secure a diffuser sheet 114 to the base 108 as best shown in Fig. 3. The base 108 and frame 112 are preferably made from a urethane coated nylon twill and are impervious to air. Base 108 includes a bottom surface 109 and sidewall 111. Frame 112 is secured around its outer perimeter to an outer perimeter of base 108 by ultrasonic or RF welding and by sewing to provide both strength

-8-

and sealing. A plurality of baffles 116 is coupled between the diffuser sheet 114 and bottom surface 109 of base 108. Baffles 116 are illustratively welded and sewn to bottom surface 109 and to webs 118 of frame 112 and to diffuser sheet 114. Baffles 116 maintain the plenum height and shape during operation. The baffles 116 include a plurality of apertures 120 to permit air flow through inlet 80 to pass through diffuser sheet 114 from the entire plenum 113 which is formed between base 108 and sheet 114.

The diffuser sheet 114 is illustratively formed from a suitable woven fabric such as a twill weave which permits controlled air flow through the sheet 114. Sheet 114 provides sufficient air flow and pressure drop for movement of the fluidizable medium 115 as discussed below. Illustratively, diffuser sheet 114 is a model number S-1500-SK11 woven material available from Tetko. Diffuser sheet 114 may also be formed from a microporous film made from, for example, polyurethane or other suitable material, which provides sufficient air flow and pressure drop for movement of the fluidizable medium 115.

Metal strips 122 are coupled to opposite sidewalls 124 of frame 112 by suitable fasteners 126. The metal strips provide a ground connection for the air fluidized seat zone 48. As illustrated in Fig. 2, one of the fasteners 126 on each side is coupled to a first end of a conductive cable 128 to provide a ground connection. An opposite end of each cable 128 is coupled to a controller outside the mattress 10.

A sidewall 130 formed from an air impervious material is welded and sewn to the perimeter of frame 112. In the embodiment illustrated in Fig. 2, the sidewall 130 includes a top zipper 132 configured to be coupled to a zipper 134 on cover 50. Sidewall 130 in Fig. 2 also includes anchor portions 136 and fastening clips 138 to hold down a flap 140 of top cover 50. At least a top surface 135 of cover 50 is formed from an air permeable material.

The fluidizable medium 115 is loaded into the interior region by unzipping the cover 50 in the embodiment shown in Fig. 2. In another embodiment illustrated in Fig. 3, the sidewall 130 is formed to include an aperture 144 configured to receive a cap 146. In the Fig. 3 embodiment, the cover 50 is sewn and welded to the sidewall 130. The fluidizable medium is loaded and drained through the inlet aperture 144.

Illustratively, the fluidizable medium 115 of the present invention includes both light weight beads and heavy weight beads to provide an overall reduced average

weight for the beads. Reduced weight is important since the fluidized zones 48 and 54 are used in replacement mattress. Two types fluidizable medium 115 are illustratively mixed together and located within the interior region 142 of the fluidized seat section 48. The first size fluidizable medium 115 is illustratively conventional size tiny spheres or beads formed from glass, ceramics, or silicon having an average size between about 50 and about 150 microns, with a specific gravity of about 2.5. These conventional size beads are mixed with beads made of Styrofoam or other suitable material having a size of about 15/1000 to about 20/1000 of an inch (.385-.508 mm), with a specific gravity of about 1. Hollow beads may also be used to reduce weight. Mixture ratios for the different sizes of fluidizable medium can be adjusted depending upon the particular application. By mixing of the beads in this manner, the average weight of the fluidizable medium 115 is less than the average weight of the conventional size beads.

The lighter average weight of the fluidizable medium 115 of the present invention facilitates transfer of the mattress from one bed frame to another. The mattress 10 can be used on conventional bed frames. The modular components within the mattress 10 are replaceable sections. In other words, the air fluidized zones 48 and 54 may be replaced with standard air cushions if desired. If air fluidized sections such as 48 and 54 are required due to a particular therapy situation, then these modules or sections can be added to the mattress 10 as needed.

Figs. 4 and 5 illustrate details of the air fluidized foot zone 54 of the present invention. Figs. 4 and 5 include structural components which function in the same or similar manner as components in the air fluidized seat zone 48 of Figs. 2 and 3. Those elements in Figs. 4 and 5 identified by reference numbers the same as in Figs. 2 and 3 perform the same or similar function. The dimensions of the rectangular fluidized zone 54 are different from the dimensions of seat zone 48 in Figs. 2 and 3. In addition, air is supplied into a lower plenum defined between base 108 and diffuser sheet 112 through an inlet 98 formed in bottom surface 109 of base 108. In the embodiment of Fig. 4, the cover 56 is coupled to the sidewall 130 by a zipper 132, 134. In the Fig. 5 embodiment, top cover 56 is sewn and welded to sidewall 130. The fill inlet aperture 150 is formed in frame 112. A cap or closure 146 is provided to permit draining and filling of the fluidizable medium 115 into an interior region 142 of the foot zone 54. A notched portion 152 is formed inside wall 130 to accommodate the aperture 150.

-10-

In operation, air is supplied to the lower plenum defined between base 108 and diffuser sheet 114 through either inlet 80 in Figs. 2 and 3 or inlet 98 in Figs. 4 and 5. The baffles 116 maintained at plenum height and rectangular shape. Air diffuses through diffuser sheet 114 with sufficient air flow velocity and pressure drop to fluidize the fluidizable medium 115 located within interior region 142. Air can pass out through fluidized seat zone 48 and fluidized foot zone 54 through top covers 50 and 56, respectively. The top covers 50 and 56 are formed from a air permeable filter material (at least on top surface 135) which permits air flow through the cover 50 or 56 but does not permit the fluidizable medium 115 to escape through the covers 50 and 56. The fluidized seat zone 48 and foot zone 54 provide excellent support for a patient on the mattress 10 and reduce the likelihood of formation of bed sores because of equal distribution of pressure. Fluidized sections 48 and 54 are also well suited for treatment of patients with skin grafts because they do not produce high shear forces, which are frictional forces generated when the patient moves on the bed. The modular mattress operates at a cooler temperature than conventional fluidized beds.

Additional details of the air wall bladder 38 are illustrated in Figs. 6-8. Because the impermeable cover 18 is coupled to the base 12, there is no way for air flowing through fluidized seat zone 48 and fluidized foot zone 54 to escape from mattress 10. Therefore, the side portions 40 and 42 of air wall bladder 38 are formed to include vent slots 160. Tubes 164 are located within side portions 40 and 42 aligned with slots 160. The tubes 164 are fabric tubes having holes to permit air flow into the tubes 164. The tubes 164 are illustratively RF welded around the boundary of slots 160. Tubes 164 include connectors 162 which extend through end wall 44 of air wall bladder 38. Connectors 162 are configured to be coupled to tubes 165 as illustrated in Fig. 1. Tubes 165 extend through apertures 167 in top cover 18. Opposite ends of tubes 165 are coupled to an exhaust fan 166 configured to withdraw air from the interior region of mattress 10 through vent slots 160, tubes 164, tubes 165, and fan 166. This provides an exhaust for air entering the mattress 10 through the fluidized seat zone 48 and fluidized foot zone 54. It is understood that other air fluidized zones may be included within the mattress 10 if desired.

It is understood that the air impermeable cover 18 may be replaced with an upper low air loss section if desired. The upper low air loss section would permit air

-11-

passing through the fluidized seat zone 48 and fluidized foot zone 54 to disburse through the low air loss cover without requiring an exhaust mechanism.

Another embodiment of the head section of the present invention is illustrated in Figs. 9 and 10. In this embodiment, the replacement mattress is located on an articulating deck 170 of a bed. The deck includes a head section 172, a seat section 174, a thigh section 176, and a foot section 178. Figs. 9 and 10 show an alternative embodiment of the knee zone 52 which includes upper and lower chambers 180 and 182. Preferably, the partitioned bladder sections 180 and 182 are maintained at different pressures.

The mattress 10 of Figs. 9 and 10 includes a reduced shear head support section 184. In the embodiment of Figs. 9 and 10, a first array of air bladders 186 are coupled together by a web of material 188 coupled to the end of each air bladder 186. Illustratively, a web 188 is located at each end of the array of tubes 186. Tubes 186 are also tethered to bottom surface 14 of base 12 by tethers or by air bladders 190 which are coupled to base 14 and to air bladders 186. The web of material 188 and the array of bladders 186 are coupled to air wall bladder 38 by strap 192. Strap 192 includes a first end 194 coupled to air wall bladder 38 and a second end 196 coupled to web 188. Strap is coupled by suitable fasteners such as snaps. Illustratively, a strap 192 is located on both sides of mattress 10. A second array of bladders 198 are located on top of bladders 186. Bladders 198 are coupled to bladders 186.

As the head section 172 of deck 170 moves upwardly to an elevated position as illustrated in Fig. 10, the bladder 186 adjacent lumbar cushion 136 engages the lumbar cushion 36 and causes the array of bladders 186 to pivot on tether bladders 190 relative to bottom surface 14 of base 12. This causes the array of bladders 186 to move in the direction of arrow 200 toward head end 23 of mattress 10. The top array of bladders 198 moves with the bottom array of bladders 186. Illustratively, the bladders 186 and 198 move about 4-5 inches (10.16-12.7 cm) toward the head end 23 of mattress 10 as the head section of mattress 10 is articulated. This causes reduced shear forces against a patient lying on the mattress. If desired, an anti-shear material can be positioned between the array of bladders 198 and the top cover 18 to facilitate sliding movement therebetween. The top array of bladders 198 may have any desired shape. For instance,

-12-

the bladders may be generally rectangular as shown in Figs. 9 and 10, or the bladders 198 may be round such as the bladders 186.

Fig. 11 illustrates another embodiment of the reduced shear head section of the present invention. The head section 202 includes an array of tubes 204 which are  
5 tethered to a central inflated section 206 by tethers 208. Opposite ends of tubes 204 are coupled together by a web 210 of material secured to tubes 204 by suitable technique such as RF welding. A pair of inflated side bolsters 212 is located on opposite sides of central inflated section 206. The array of tubes 204 is located adjacent lumbar cushion 36. As the head section 202 is pivoted upwardly in the direction of arrow 214, the first  
10 bladder 204 engages lumbar section 36 and causes movement of the array of bladders 204 in the direction of arrow 216 to reduce shear forces on a body lying on the mattress 10.

Figs. 12 and 13 illustrate another embodiment of the reduced shear head section which is similar to the embodiment illustrated in Fig. 11. In this embodiment, however, a strap 192 is used to tie the head section 202 to the air wall bladder 38 as  
15 discussed above. First end 194 of strap 192 is coupled to the air wall bladder 38 by suitable connectors such as a snap or other suitable connector. The second end 196 of strap 192 is coupled to the array of bladders 204. As the head section 202 is pivoted upwardly, the bladder 204 engages the air wall bladder 38 or a lumbar cushion, if installed, to cause the array of bladders 204 to pivot relative to bottom surface 14 of base  
20 12. This causes bladders 204 to move in the direction of arrow 200 toward the head end 23 of mattress 10.

Although the invention has been described in detail with reference to certain illustrative embodiments, variations and modifications exist within the scope and spirit of the present invention as defined in the following claims.

-13-

## CLAIMS:

1. A mattress comprising:  
an outer cover having an interior region and a top support surface;  
5 a module receiving section located in the interior region of the cover, the module receiving section having a first coupling portion in fluid communication with an air supply; and  
an air fluidized module having a first chamber containing a fluidizable material, a second chamber, a second coupling portion coupled to the module in fluid  
10 communication with the second chamber, and an air permeable sheet located between the first and second chambers, the air fluidized module being configured to be located in the module receiving section, and the first and second coupling portions being configured to be coupled together to provide fluid communication between the air supply and the second chamber so that air from the air supply passes into the second chamber and  
15 through the air permeable sheet to fluidize the fluidizable material in the first chamber.
2. The mattress of claim 1, wherein the air fluidized module has a top surface which is air permeable.
3. The mattress of claim 1, further comprising a non-fluidized module including a flexible air impermeable outer wall defining an interior region and a third  
20 coupling portion coupled to the outer wall in fluid communication with the interior region of the non-fluidized module, the fluidized module and the non-fluidized module being interchangeable in the module receiving section with the first coupling portion being configured to couple alternatively with one of the second coupling portion of the fluidized module and the third coupling portion of the non-fluidized module.
- 25 4. The mattress of claim 1, further comprising a manifold located between the air supply and the first coupling portion of the module receiving section, and a control valve to control the rate of air supply to the first coupling portion.
5. The mattress of claim 4, further comprising an inflatable air cushion located adjacent the air fluidized module in the interior region of the cover, the air cushion  
30 being coupled to the air supply through the manifold.

-14-

6. The mattress of claim 1, further comprising a head support section located adjacent the module receiving section, the head support section having a shear-reducing support surface.

7. The mattress of claim 6, wherein the head support section is  
5 coupled for movement relative to the module receiving section upon articulation of a deck on which the mattress is located.

8. The mattress of claim 1, wherein the air fluidized module includes a base formed from an air impermeable material, the base including a bottom surface and a side wall configured to define an interior region, an air permeable diffuser located within  
10 the interior region of the base, the diffuser being coupled to the side wall of the base to define the first chamber and the second chamber, an air impermeable top surface coupled to the base, a plurality of baffles coupled to the base, the baffles being located in the second chamber.

9. The mattress of claim 1, further comprising a head support section  
15 located adjacent the module receiving section in the interior region of the cover, the head support section having a base portion and a shear reducing support surface pivotably coupled to the base portion, and a coupler connected between the module receiving section and the head support section so that the head support section moves toward the head end of the mattress as the head support section is moved to an elevated position  
20 relative to the module receiving section.

10. The mattress of claim 1, wherein the outer cover is formed from an air impermeable material, and further comprising a vent connector coupled to the outer cover in communication with the interior region of the cover, the vent connector being configured to exhaust air from the interior region of the cover.

25 11. A support module for a mattress comprising:  
a base formed from an air impermeable material, the base including a bottom surface and a side wall configured to define an interior region;  
an air permeable diffuser located within the interior region of the base, the diffuser being coupled to the side wall of the base to define an upper air fluidized chamber  
30 configured to receive a fluidizable material therein and a bottom plenum;  
an air impermeable top surface coupled to the base;



-15-

a plurality of baffles coupled to the base, the baffles being located in the plenum; and

an air connector coupled to the base in communication with the plenum to supply air to the plenum to fluidize the fluidizable material within the air fluidized chamber above the plenum.

12. The support module of claim 11, wherein the air fluidized chamber includes an access port providing for removing and inserting the fluidizable material.

13. The support module of claim 11, further comprising a top cover including the air permeable top surface and a side wall extending from the top surface, the side wall of the top cover being coupled to the side wall of the base.

14. The support module of claim 13, the side wall of the top cover includes a first zipper half and the side wall of the base include a second zipper half, and the first zipper half and second zipper half being coupled to attach the top cover to the base.

15. The support module of claim 13, wherein the top cover is removable from the base to provide access to the fluidizable material.

16. The support module of claim 11, further comprising at least one grounding strip coupled to the side wall of the base.

17. The apparatus of claim 16, further comprising a conductive cable coupled to the at least one grounding strip to provide a ground connection for the support module.

18. The apparatus of claim 11, wherein the base includes a bottom surface, a frame, and a separate side wall coupled together to form the base.

19. The apparatus of claim 11, further comprising a frame coupled to the side wall of the base, the frame being configured to support the diffuser.

20. The apparatus of claim 19, wherein the frame includes a plurality of webs extending between opposite sides of the frame, the baffles being coupled between the webs and the bottom surface of the base.

21. The apparatus of claim 20, wherein the baffles are ultrasonically welded and sewn to the bottom surface, the webs of the frame, and the diffuser sheet.

22. The apparatus of claim 11, wherein the baffles are each formed to include a plurality of apertures to permit air flow through the plenum.

-16-

23. The apparatus of claim 11, further comprising a plurality of fasteners coupled to the side wall of the base, the fasteners being configured to secure the support module within the mattress.

24. A mattress having a head end and a foot end, the mattress  
5 comprising:  
a first support section configured to support an occupant's feet, legs, and seat,

a head support section located adjacent the head end of the mattress, the head support section having a base portion and a shear reducing support surface pivotably  
10 coupled to the base portion, and

a coupler connected between the first support section and the head support section so that the head support section moves toward the head end of the mattress as the head support section is moved to an elevated position relative to the first support section.

25. The mattress of claim 24, wherein the first mattress section  
15 includes an air fluidized module containing a fluidizable material, the fluidized module being connected to an air supply.

26. The mattress of claim 25, wherein the first support section also includes an inflatable non-fluidized zone connected to the air supply.

27. The mattress of claim 24, wherein the head support includes at  
20 least one air cushion.

28. The mattress of claim 24, wherein the head support includes a set of air cushions pivotably coupled to the base.

29. The mattress of claim 28, further comprising a second set of air cushions located above the air cushions pivotably coupled to the base.

25 30. A mattress comprising:  
an outer cover formed from an air impermeable material, the outer cover being configured to define an interior region and having a top support surface;  
at least one air fluidized support module located within the interior region of the cover of the mattress, the air fluidized module including a plenum, a chamber  
30 located over the plenum, and a fluidizable material located within the chamber, the chamber including an air permeable top surface;

-17-

a connector coupled to the plenum, the connector being configured to be coupled to an air supply to supply air to the plenum and fluidize the fluidizable material located within the chamber; and

5 a vent connector coupled to the outer cover in communication with the interior region of the cover, the vent connector being configured to exhaust air from the interior region of the cover.

31. The apparatus of claim 30, further comprising a fan coupled to the vent connector to assist removal of air from the interior region of the cover.

10 32. The apparatus of claim 30, further comprising a second connector coupled to the outer cover, the second connector being configured to be coupled to an air supply, and a tube coupled between the second connector on the outer cover and the connector of the plenum to supply air to the plenum through the outer cover.

33. The apparatus of claim 32, further comprising a heat exchanger coupled between the air supply and the second connector of the outer cover.

15 34. The apparatus of claim 30, further comprising an air bladder located adjacent the air fluidized support module, and an air supply line extending through the air bladder, the air supply line being coupled to the connector to supply air to the plenum.

20 35. The apparatus of claim 30, wherein a plurality of air cushions are also located within the interior region of the cover.

36. The apparatus of claim 35, wherein the plurality of air cushions are air impermeable support cushions.

37. The apparatus of claim 30, further comprising an air quilt located on the top surface of the cover.

25 38. The apparatus of claim 30, further comprising an air bladder located adjacent the air fluidized support module in the interior region of the cover, the air bladder being formed to include a vent slot in communication with the vent connector.

30 39. The apparatus of claim 38, further comprising a tube having a plurality of holes coupled to the air bladder in communication with the vent slot, the tube being coupled to the vent connector.

40. The apparatus of claim 30, wherein the fluidized module includes a base formed from an air impermeable material, the base including a bottom surface and a

-18-

side wall configured to define an interior region, an air permeable diffuser located within the interior region of the base, the diffuser being coupled to the side wall of the base to define the chamber and the plenum, and a plurality of baffles coupled to the base, the baffles being located in the plenum.

5

1 / 8

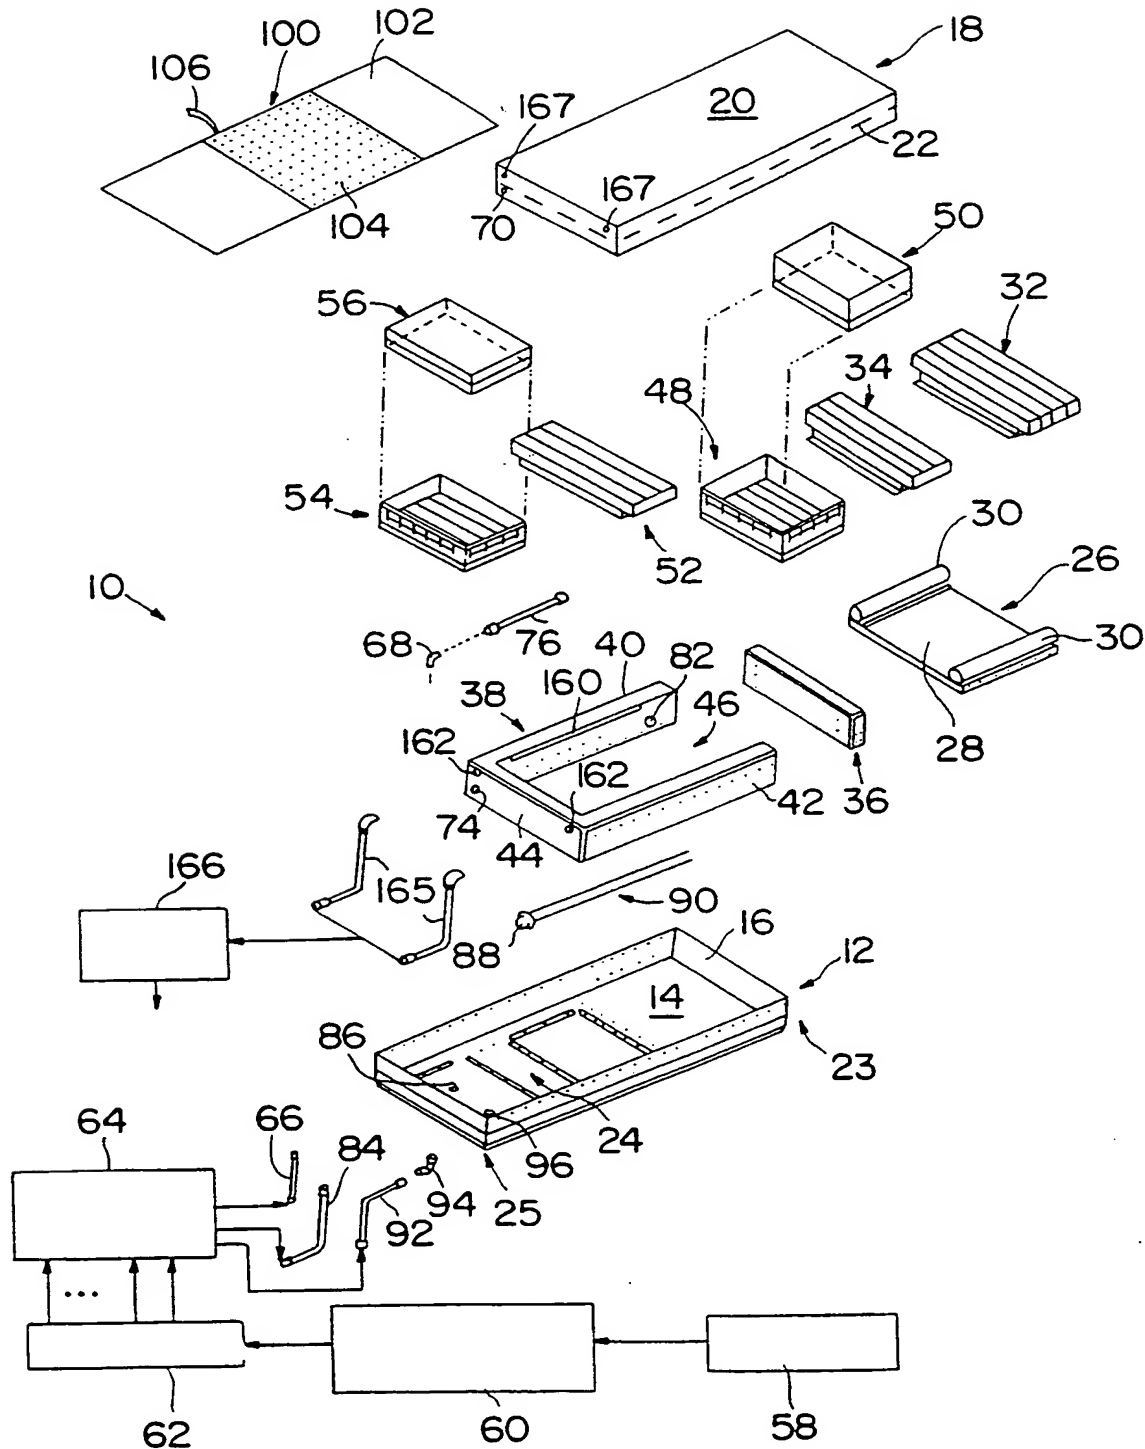


FIG. 1

SUBSTITUTE SHEET ( rule 26 )

2 / 8

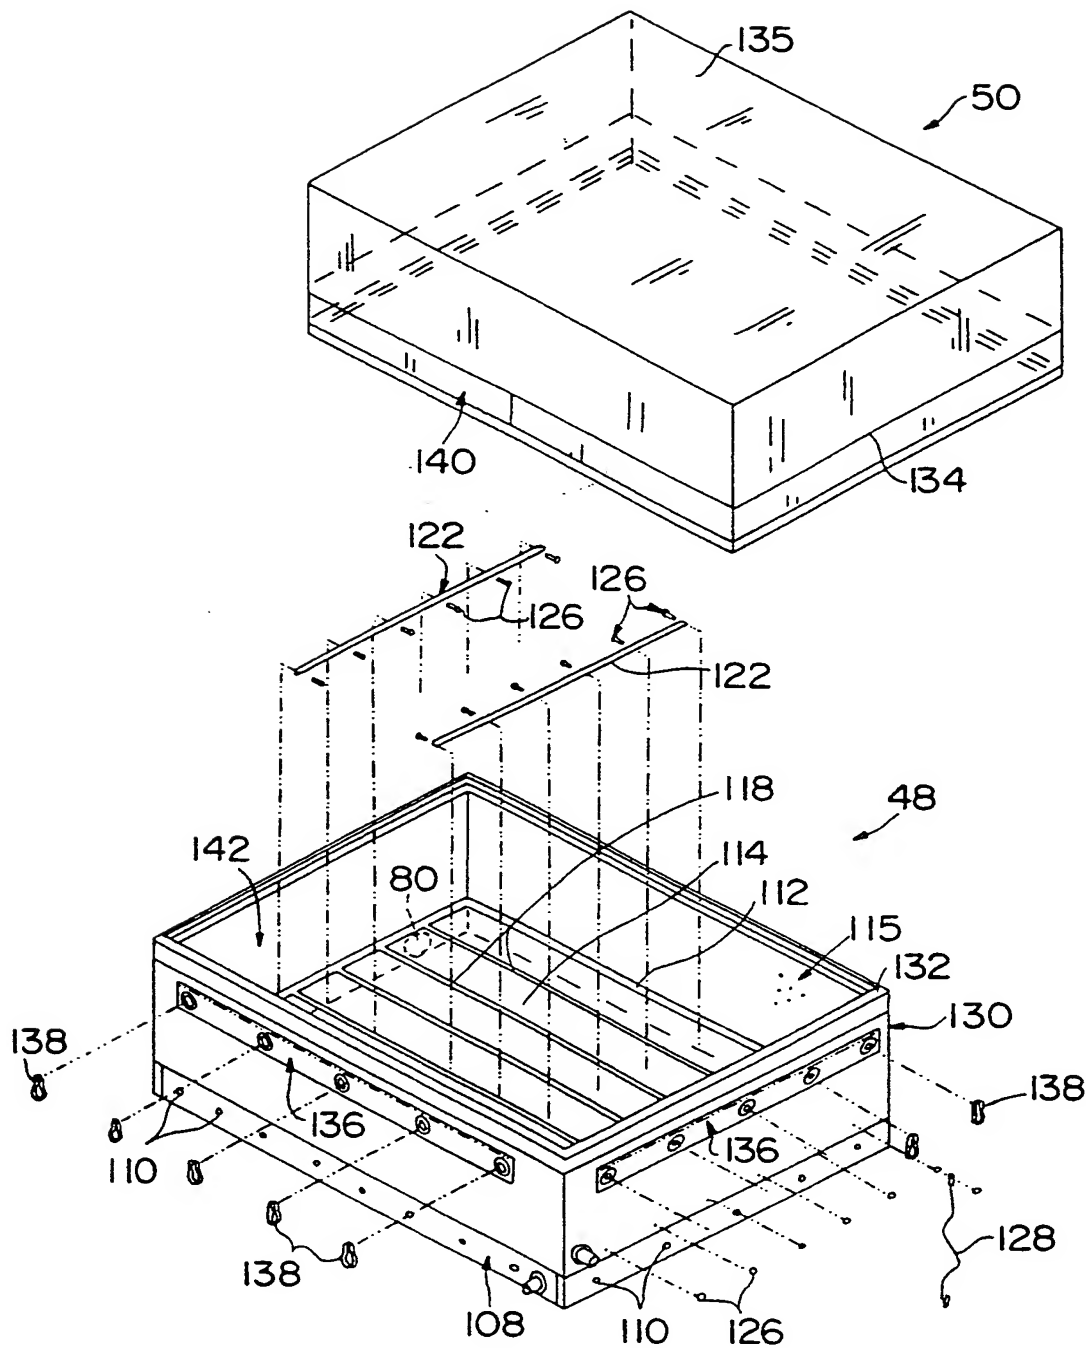


FIG. 2

3 / 8

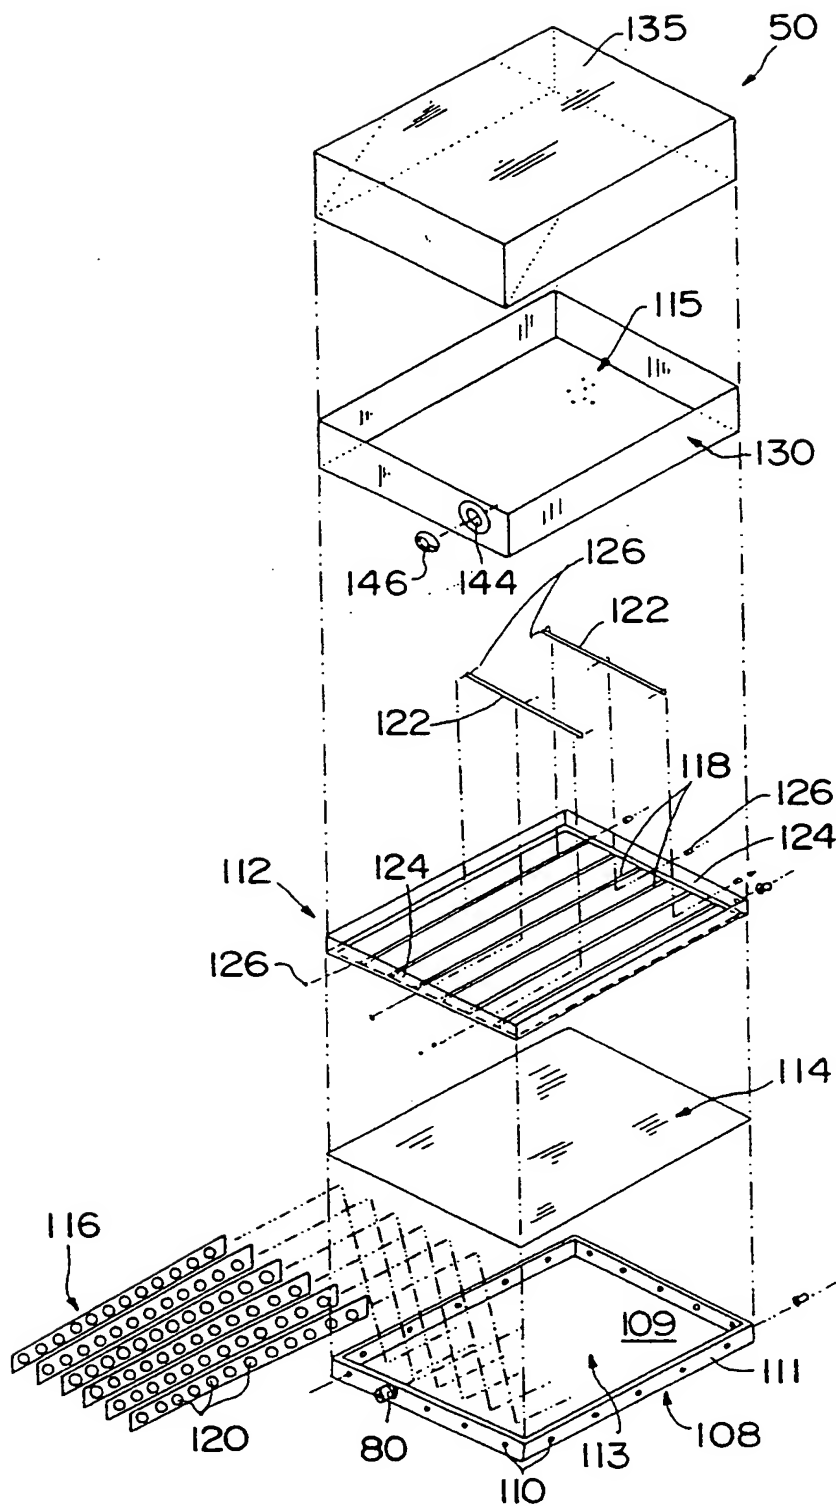


FIG. 3

4 / 8

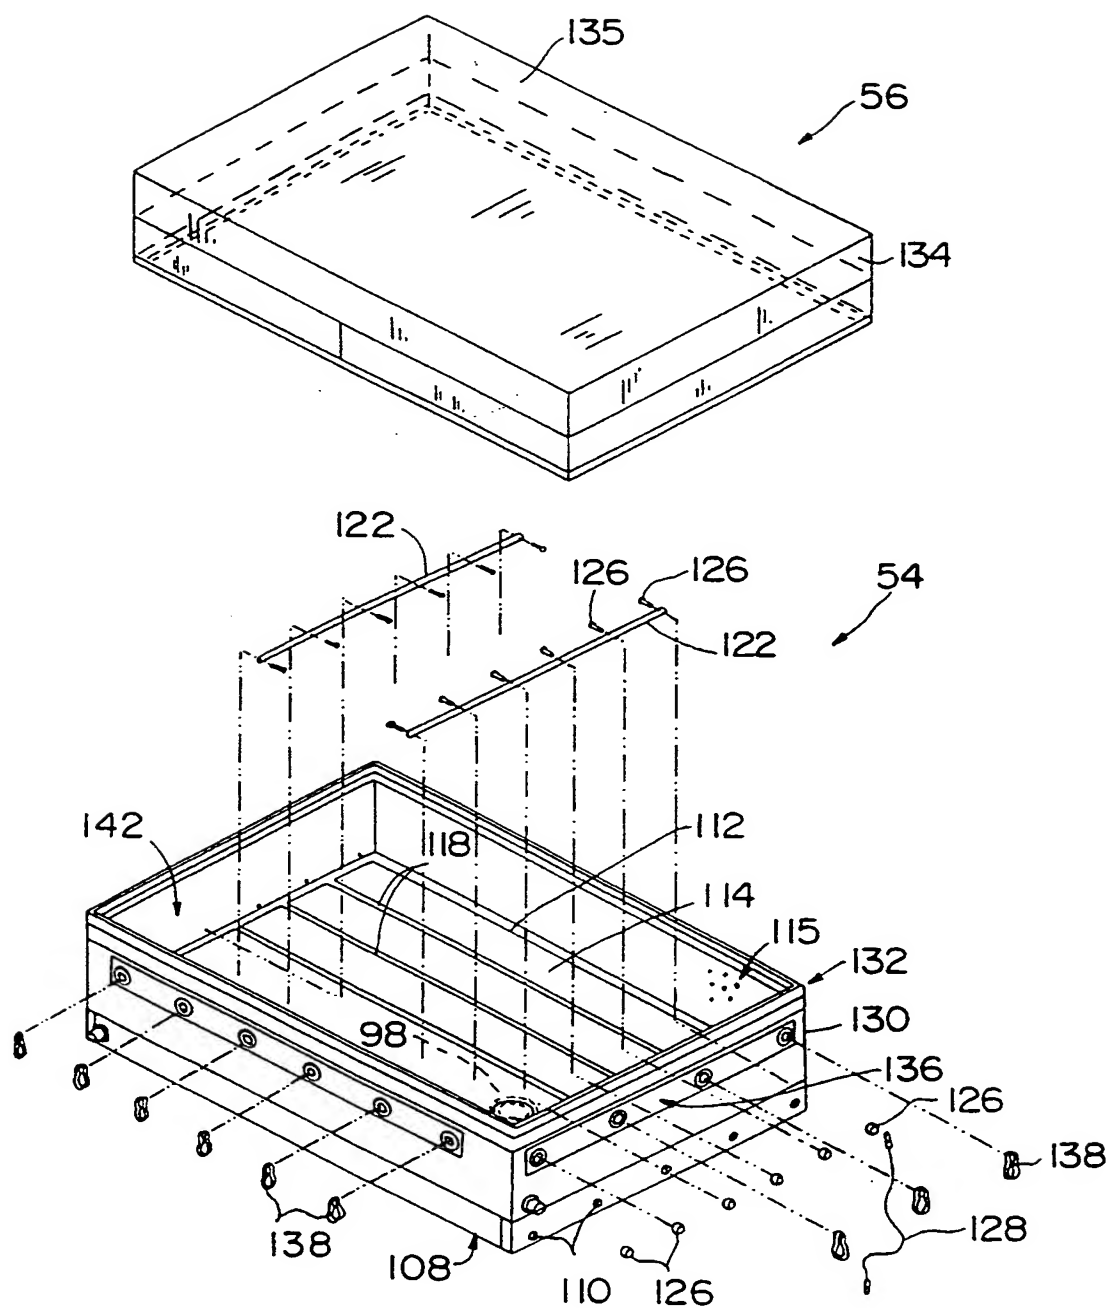


FIG. 4



5 / 8

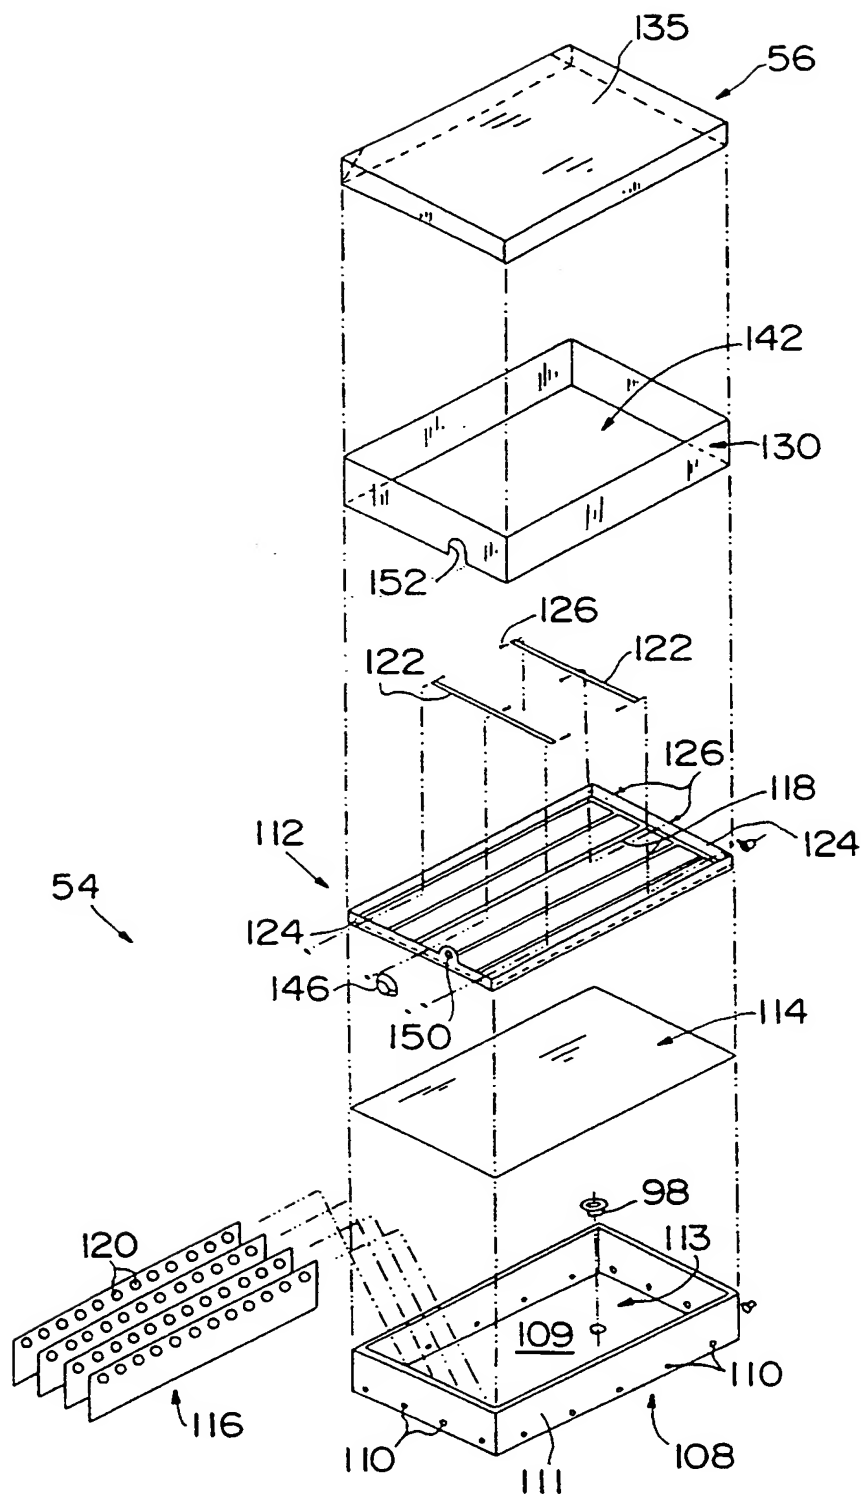


FIG. 5

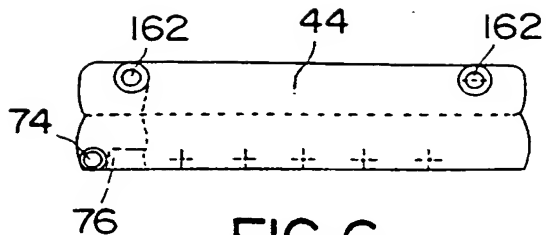


FIG. 6

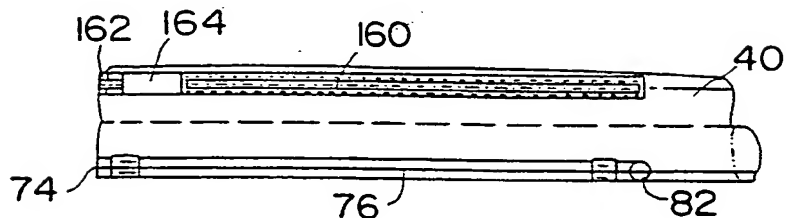


FIG. 7

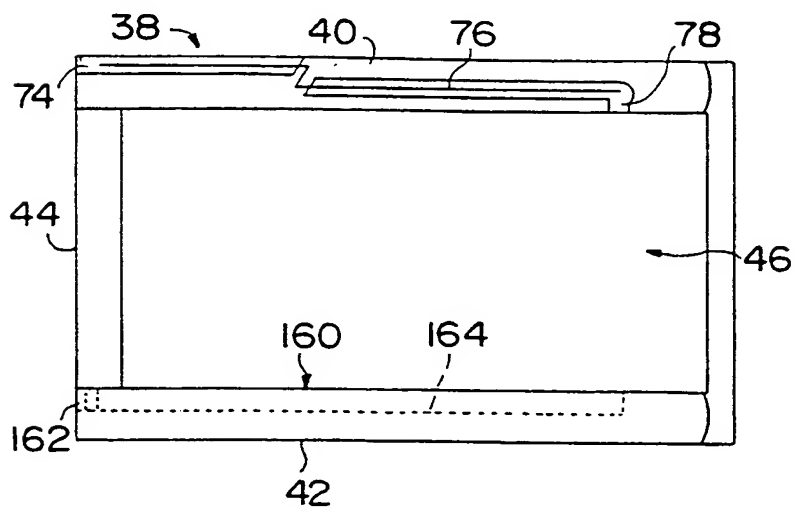


FIG. 8

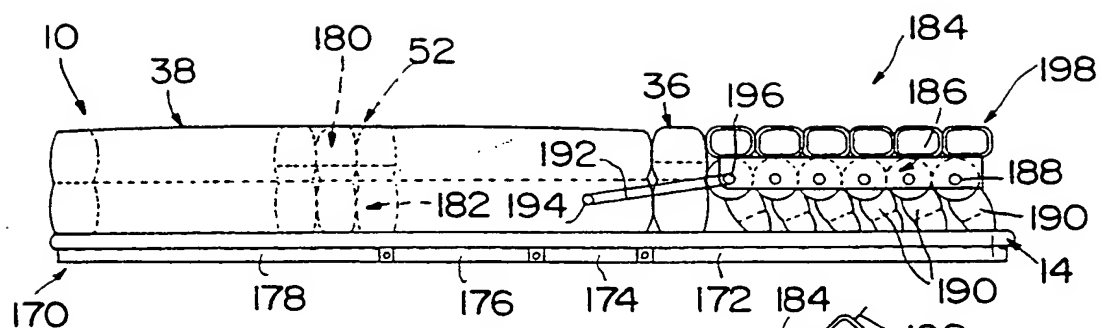


FIG. 9




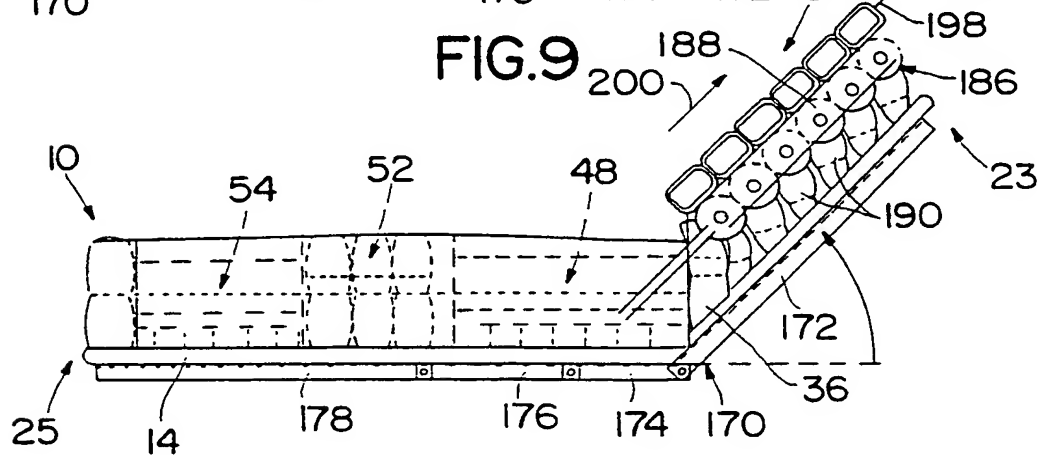


FIG. 10

8 / 8

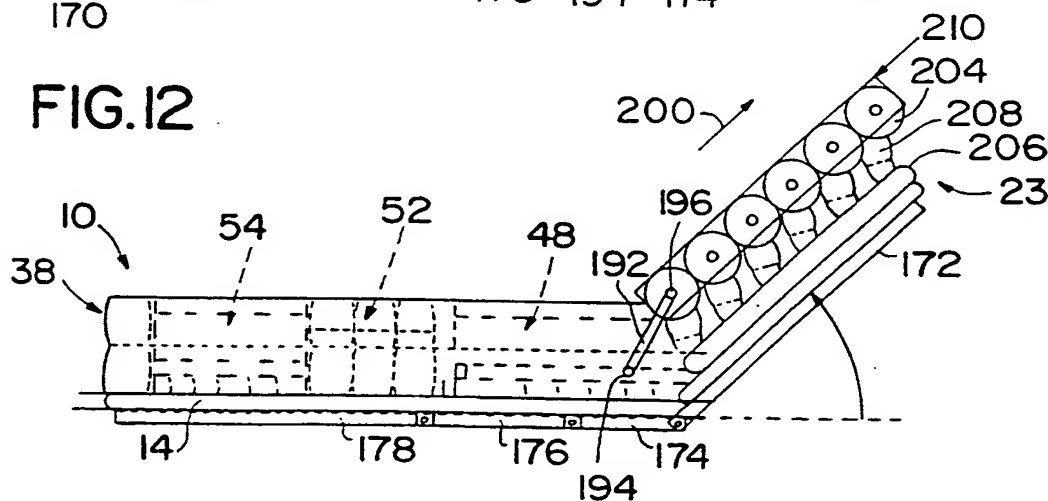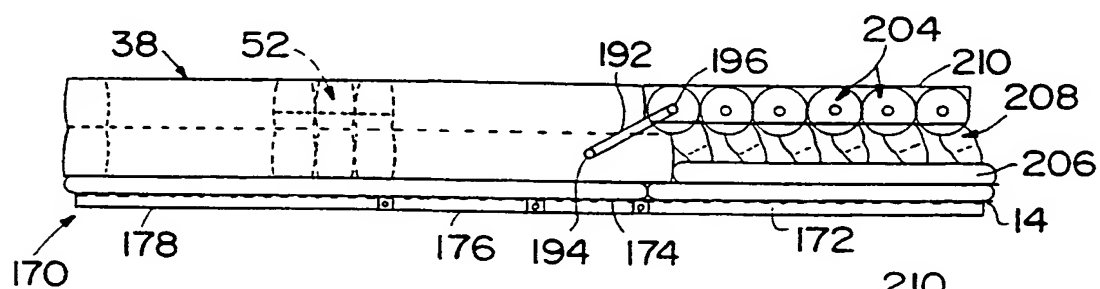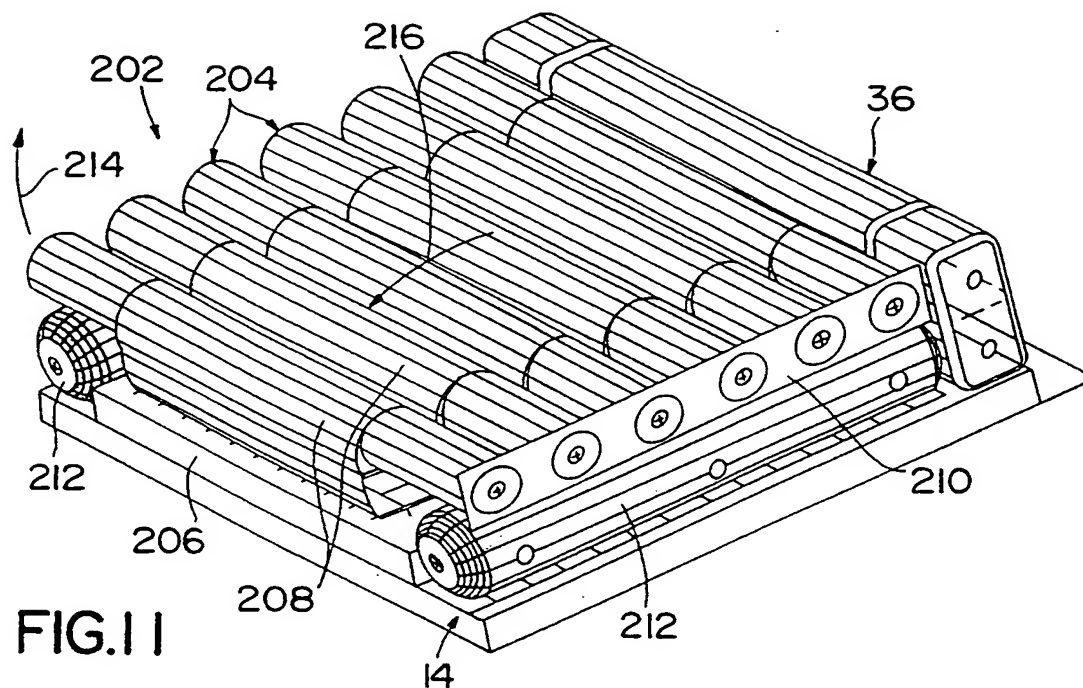

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/22526

**A. CLASSIFICATION OF SUBJECT MATTER**  
 IPC 6 A47C27/10 A61G7/057

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
 IPC 6 A47C A61G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 96 33641 A (KINETIC CONCEPTS INC) 31 October 1996 see the whole document ---	1-40
A	US 5 623 736 A (SOLTANI SOHRAB ET AL) 29 April 1997 see the whole document ---	1-40
A	US 5 036 559 A (HARGEST THOMAS S) 6 August 1991 see the whole document ---	1-40
A	US 5 029 352 A (HARGEST THOMAS S ET AL) 9 July 1991 see the whole document ---	1-40
-/--		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

**\* Special categories of cited documents :**

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"S" document member of the same patent family

Date of the actual completion of the international search

10 February 1999

Date of mailing of the international search report

18/02/1999

Name and mailing address of the ISA  
 European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Joosting, T

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/22526

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 95 31920 A (EGERTON HOSPITAL EQUIP ; THOMPSON MARTIN STUART (GB)) 30 November 1995 see the whole document ---	1-40
A	US 5 267 364 A (VOLK CRAIG K) 7 December 1993 see the whole document -----	15

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/22526

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9633641	A	31-10-1996	AU 5571496 A CA 2216791 A EP 0821559 A	18-11-1996 31-10-1996 04-02-1998
US 5623736	A	29-04-1997	NONE	
US 5036559	A	06-08-1991	US 4942635 A AT 141151 T CA 2004240 A,C DE 68913471 D DE 68913471 T DE 68926969 D DE 68926969 T EP 0375206 A EP 0569056 A EP 0569057 A EP 0569058 A JP 1780216 C JP 2213346 A JP 4070019 B US 4914760 A US 4967431 A US 5029352 A	24-07-1990 15-08-1996 20-06-1990 07-04-1994 29-09-1994 19-09-1996 06-03-1997 27-06-1990 10-11-1993 10-11-1993 10-11-1993 13-08-1993 24-08-1990 09-11-1992 10-04-1990 06-11-1990 09-07-1991
US 5029352	A	09-07-1991	US 4942635 A AT 141151 T CA 2004240 A,C DE 68913471 D DE 68913471 T DE 68926969 D DE 68926969 T EP 0375206 A EP 0569056 A EP 0569057 A EP 0569058 A JP 1780216 C JP 2213346 A JP 4070019 B US 4914760 A US 4967431 A US 5036559 A	24-07-1990 15-08-1996 20-06-1990 07-04-1994 29-09-1994 19-09-1996 06-03-1997 27-06-1990 10-11-1993 10-11-1993 10-11-1993 13-08-1993 24-08-1990 09-11-1992 10-04-1990 06-11-1990 06-08-1991
WO 9531920	A	30-11-1995	AT 172618 T AU 2534095 A DE 69505655 D EP 0759716 A US 5755000 A	15-11-1998 18-12-1995 03-12-1998 05-03-1997 26-05-1998
US 5267364	A	07-12-1993	NONE	





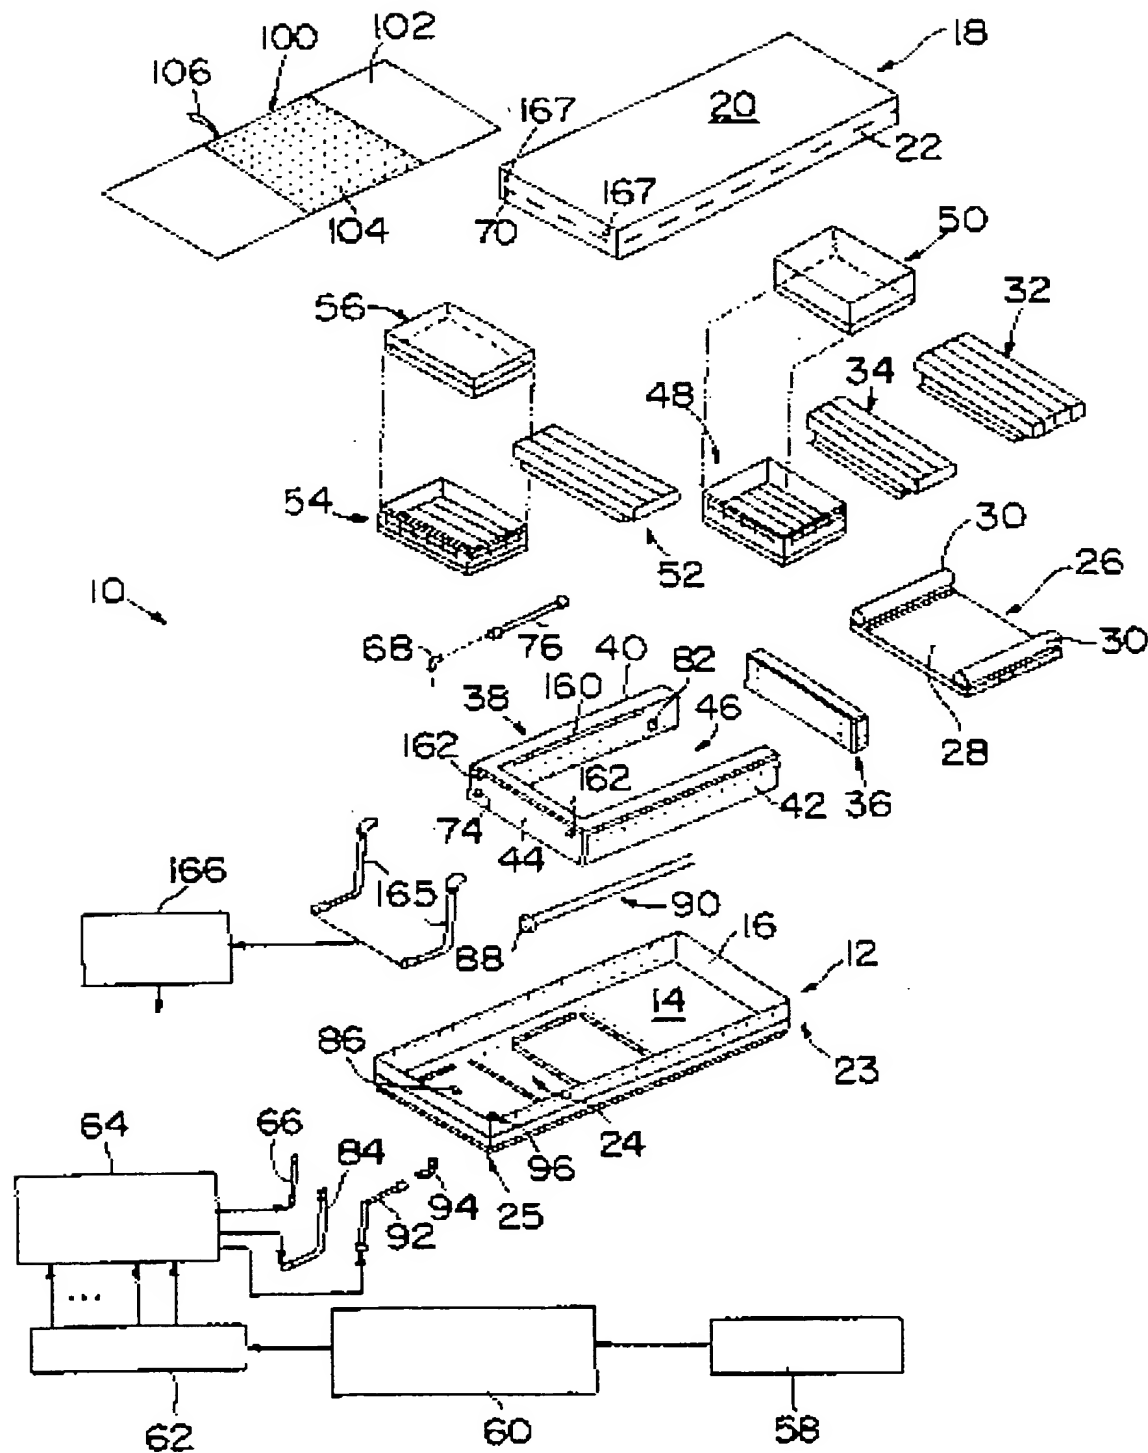


FIG. 1

**SUBSTITUTE SHEET ( rule 26 )**

2 / 8

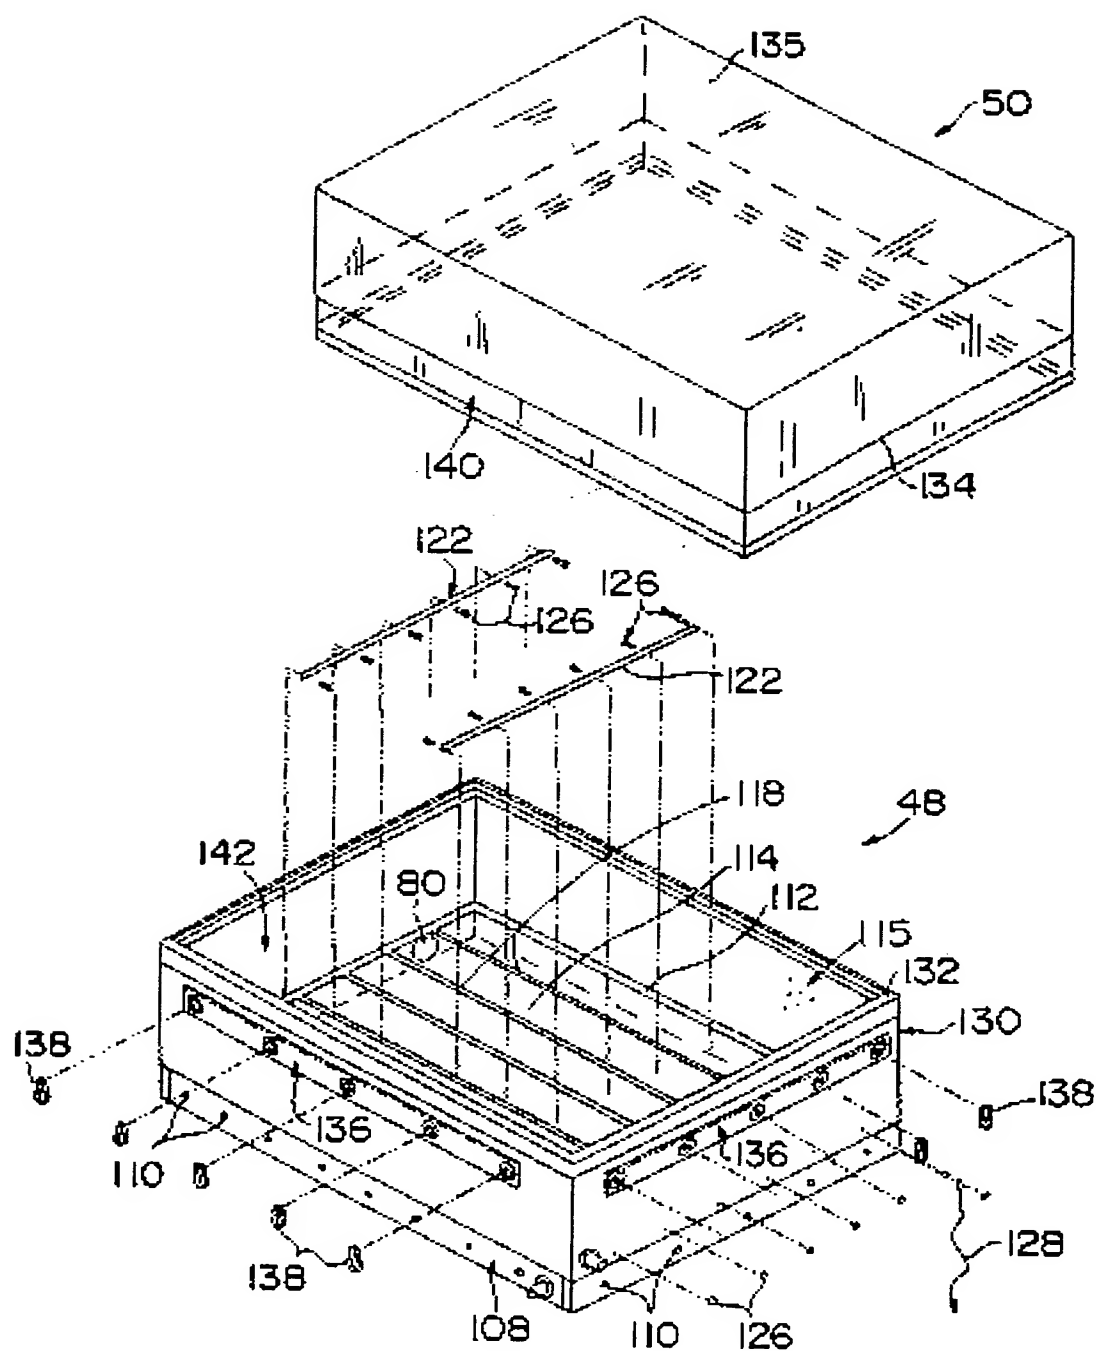


FIG. 2

3 / 8

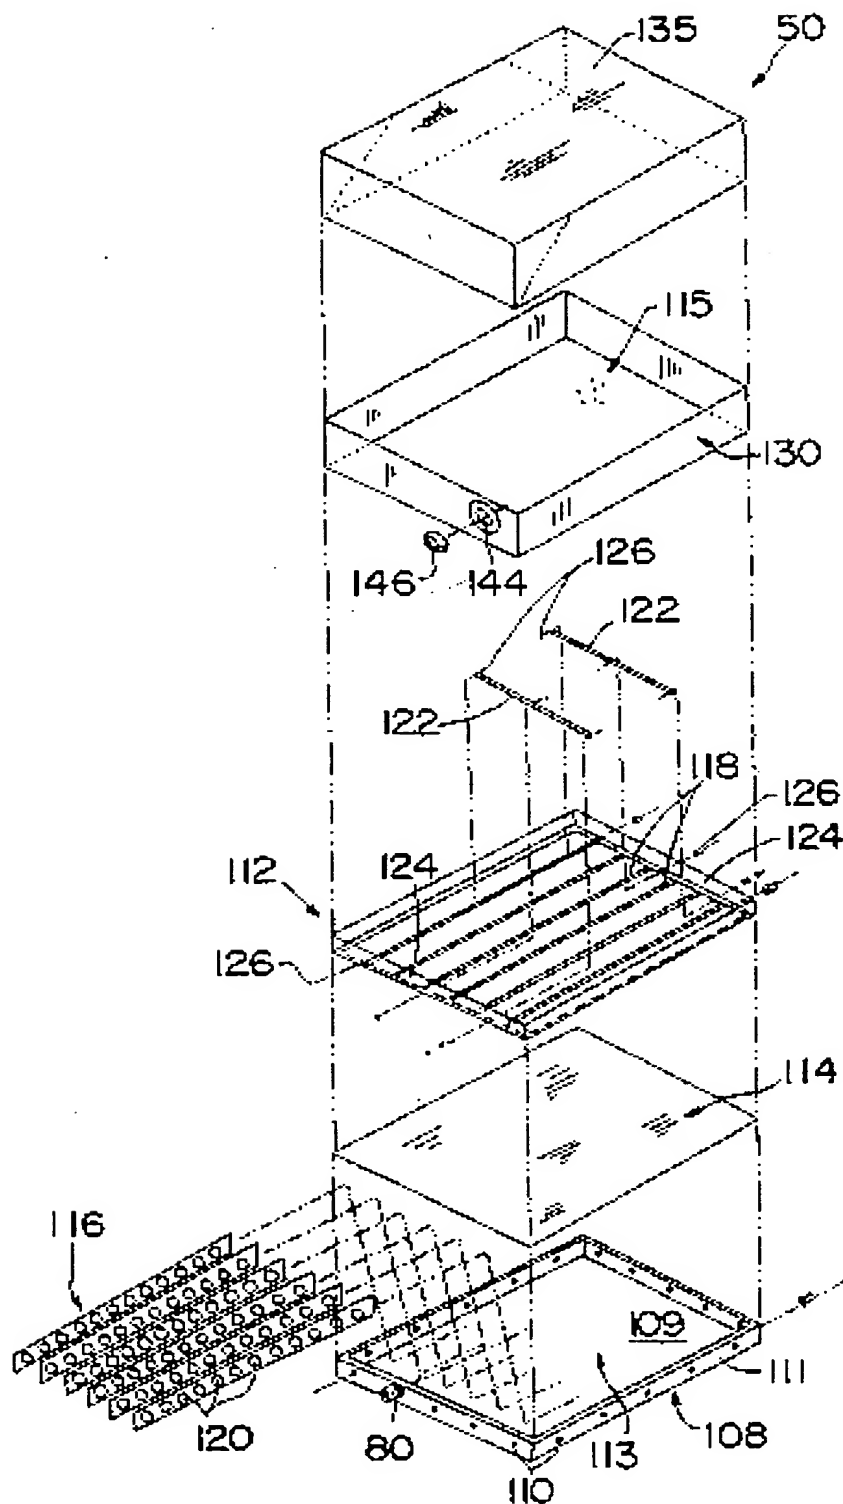


FIG. 3

4 / 8

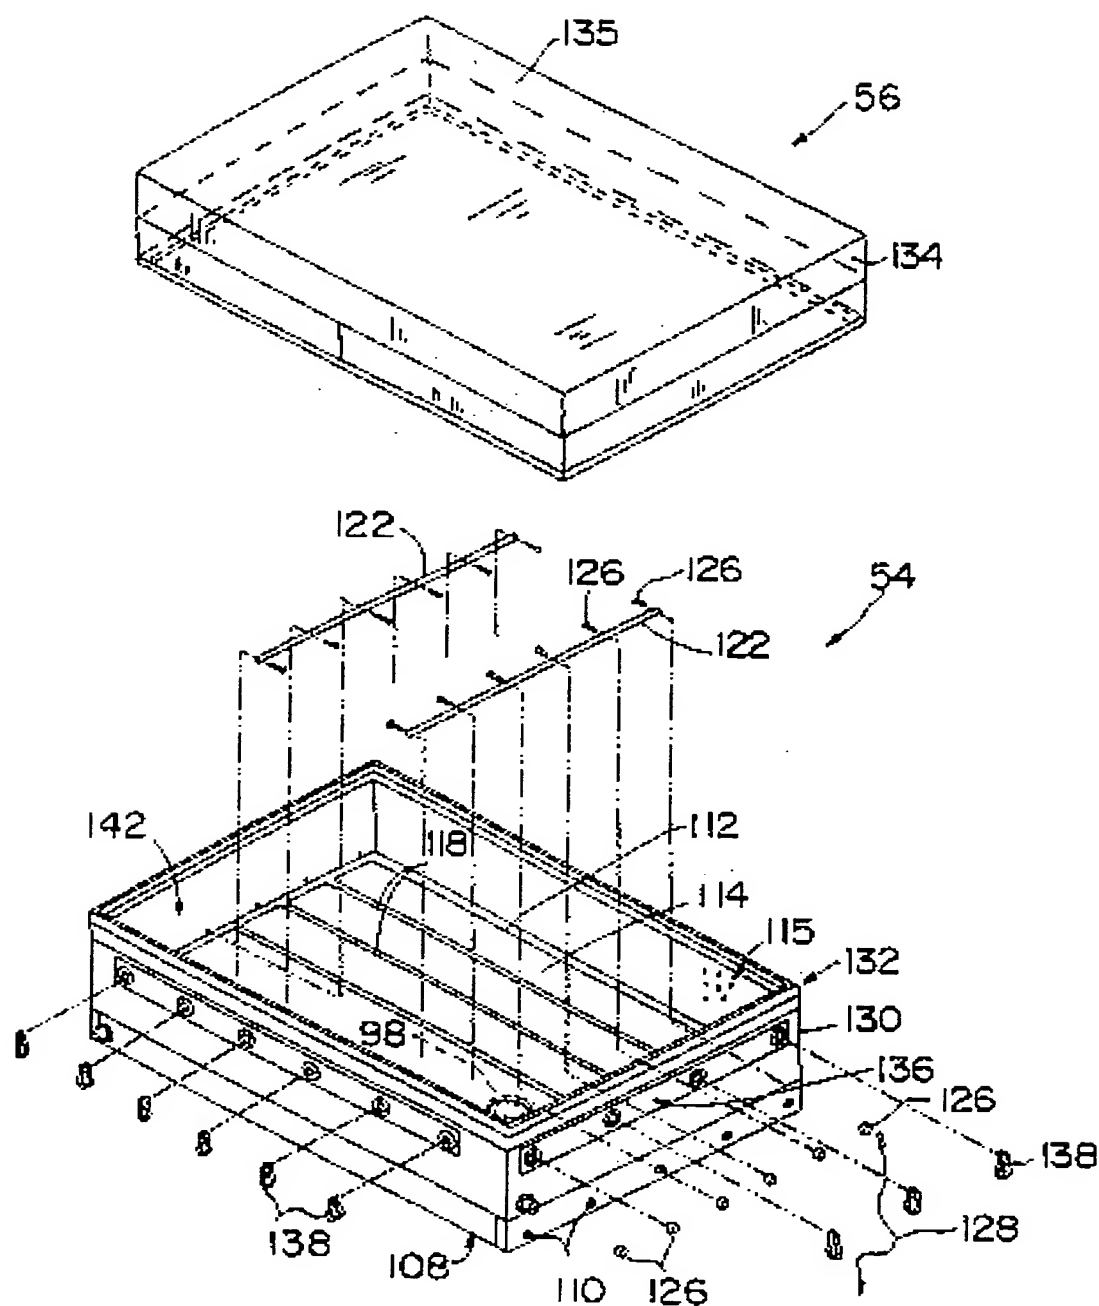


FIG. 4

5 / 8

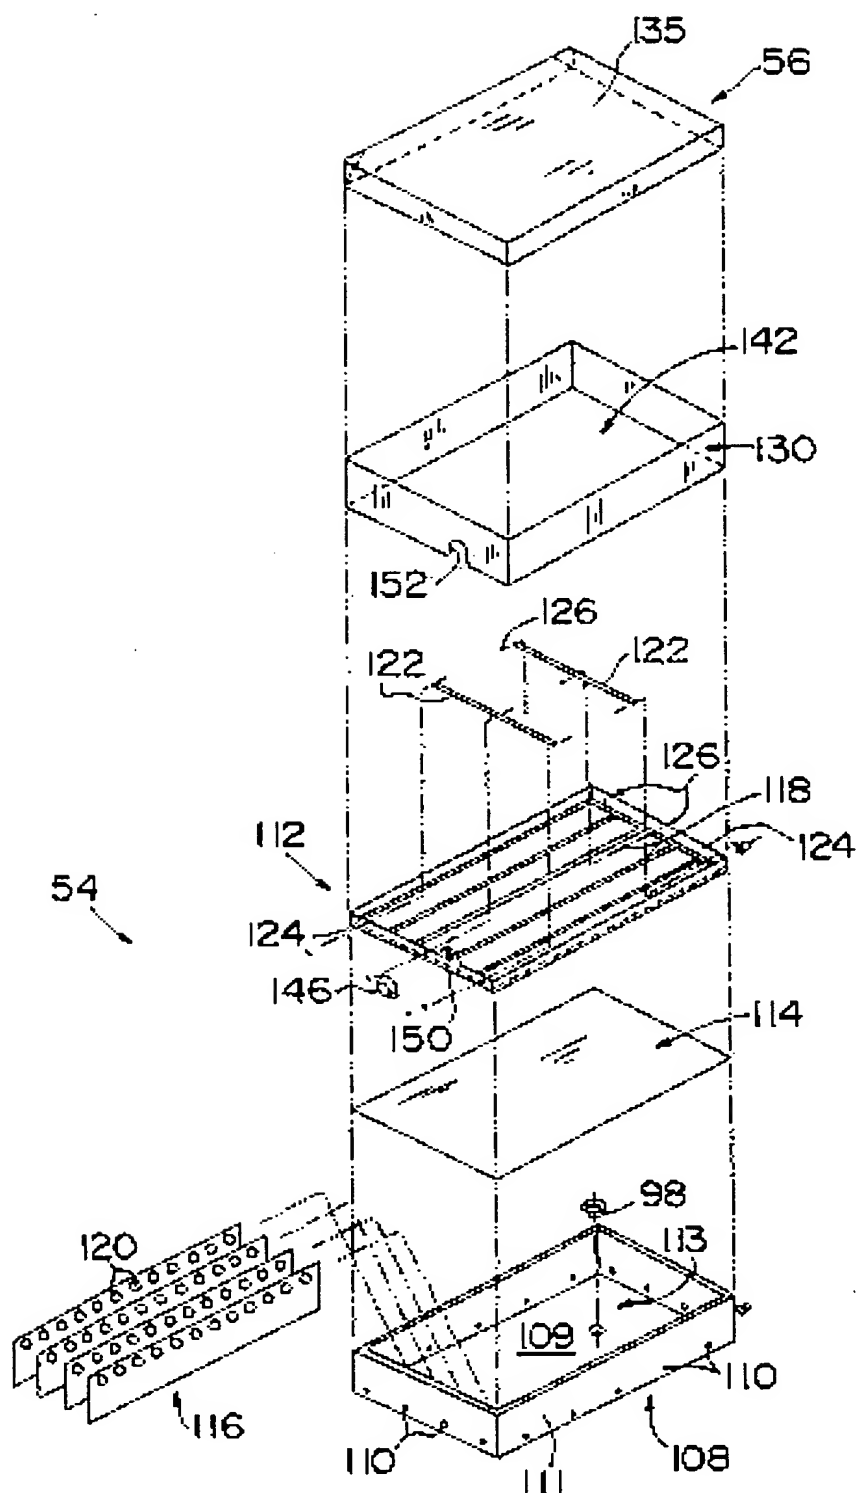


FIG. 5

SUBSTITUTE SHEET (rule 26)

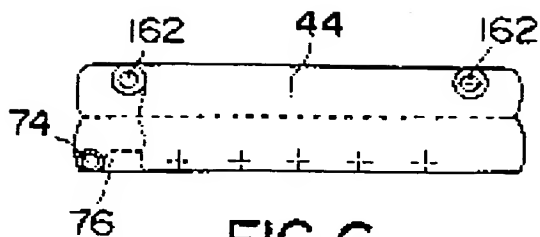


FIG. 6

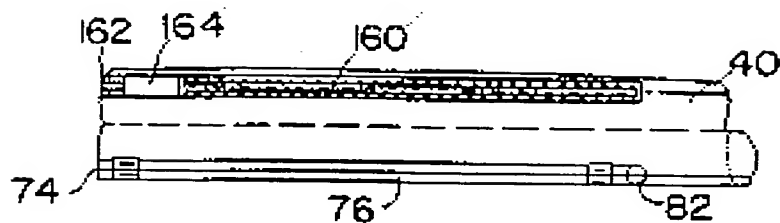


FIG. 7


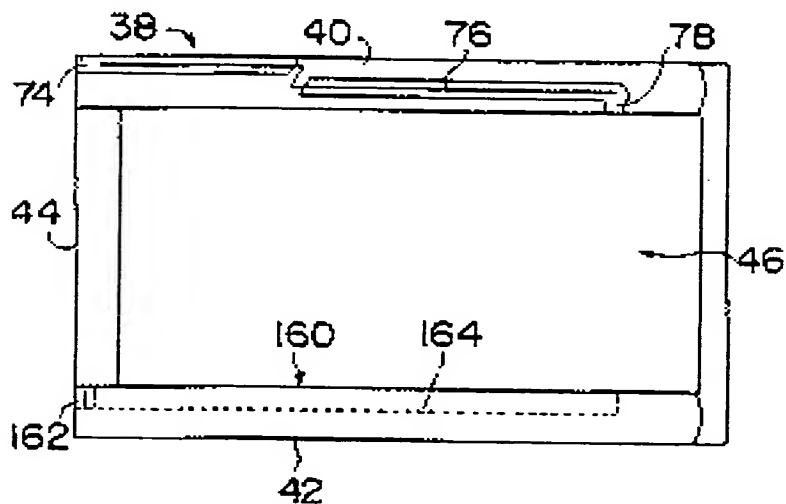


FIG. 8



8 / 8

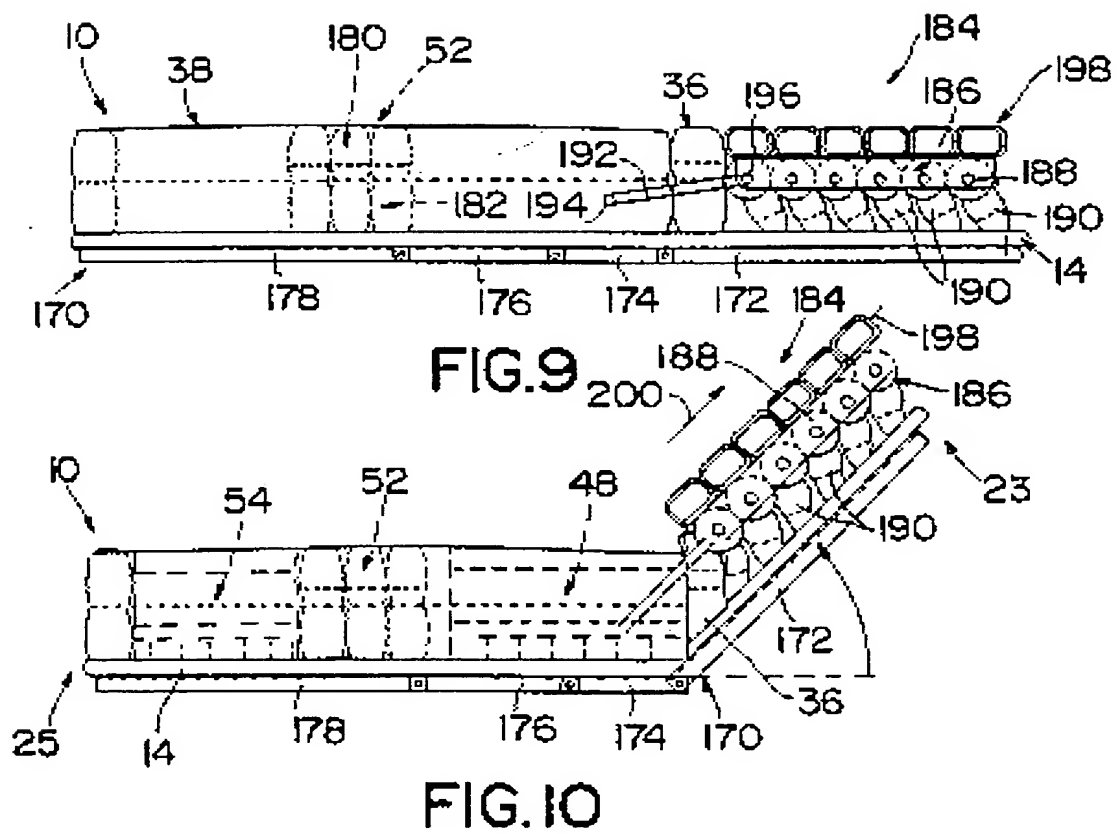